



Features

The Aurora Edwards Series Model 150 Rotary Gear Pump has several unique features that make Aurora Edwards Series the right choice for many pumping requirements:


- Rotors synchronized by timing gears – they never touch
- Casing liners
- Shafts are supported on both ends by bearings – not bushings
- Pump drive flexibility – direct drive in most cases
- Bronze construction
- Dry running capability
- Self priming
- Electric, diesel engine or water turbine drive

Applications

Fire Protection

- Fire-fighting foam concentrate pumping
- Water mist pumps
- UL-listed/FM approved or non-listed applications
- Stationary or mobile systems


Aurora Edwards Series manufactures pumps to adapt to existing or new drive equipment. We custom build complete pumping packages. Our expertise includes complete assemblies with motors, engines, pumping skids and electrical apparatus with controls. Please feel free to contact us regarding your requirements.

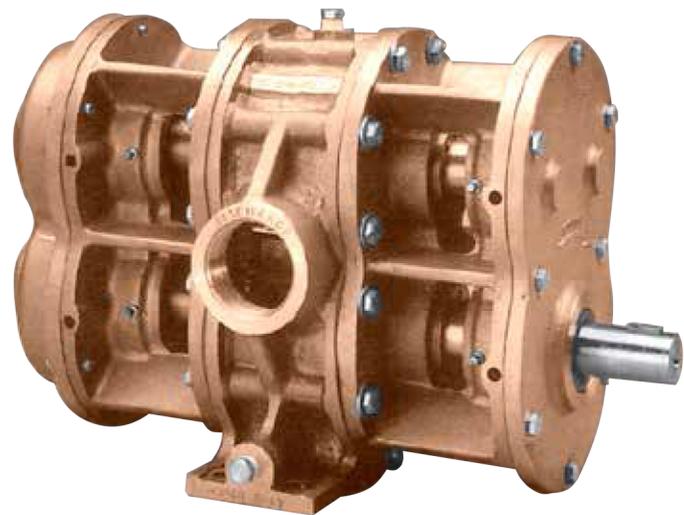

Model 150 Pump Specifications	
Materials of construction	Bronze
Options	Flanged connections, special mounting options
Sealing	Teflon lip seals
Temperature	200°F maximum
Discharge pressures	200 psig maximum
Ports	2" x 2" NPT (female)
Pump drives	Hydraulic, electric, gas or diesel engine, PTO, water turbine
RPM range	Up to 1,200 rpm continuous Up to 2,000 rpm intermittent




Approximate Overall Dimensions:

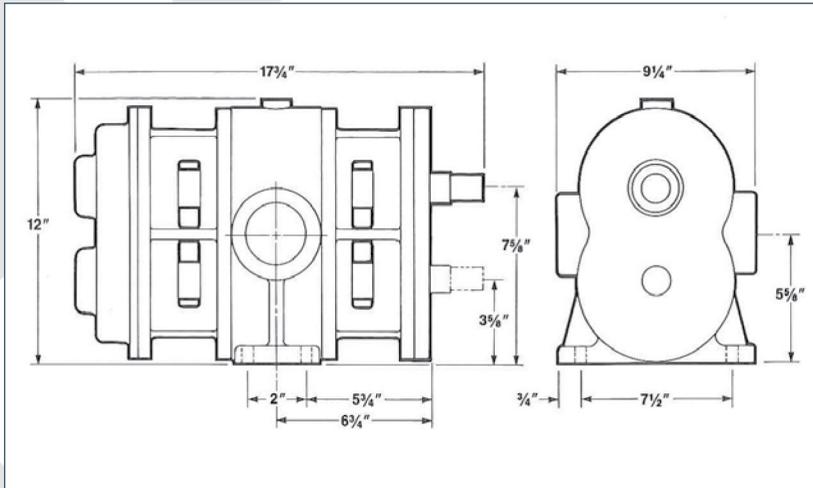

Average weight - Pump only: 158#

Performance Characteristics (standard duty):

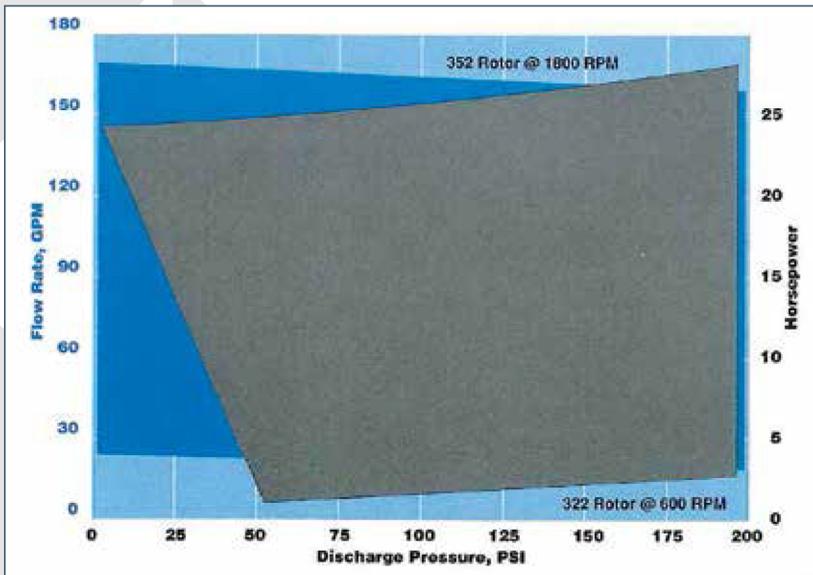

Other rotor sizes available

