


For Use With 1 1/2" Fire Hose Rack Assembly

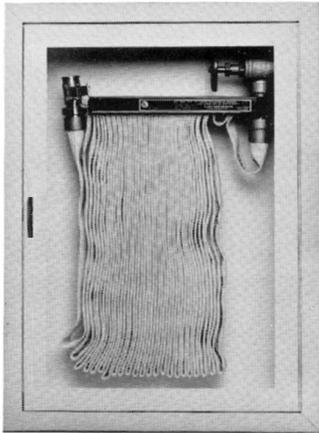

1000 Series

Series 1000 cabinets will accommodate a single 1 1/2 Fire Hose Rack assembly .

STANDARD EQUIPMENT

- * Heavy gauge steel construction tub, door and trim
- * White powder coat finish
- * Continuous steel piano hinge
- * Pull handle with roller catch

CABINET OPTIONS

- * Prefix **FR** for Fire Rated Cabinet
- * Suffix **AL** for clear anodized aluminum door and frame
- * Suffix **SS** for Stainless Steel # 4 finish door and frame
- * Suffix **FF** for Detention Grade Heavy Steel Door And Trim
- * Door Styles See page 2-5
- * Other cabinet options See page 2-7, 2-19 and 2-20

ORDERING PROCEDURE



- * Select cabinet Figure No.
- * Select door style
- * Select type of hose rack assembly (Refer to Section 3000)
- * Select extinguisher if required (Refer to Section 4000) 5lb. ABC will fit this series
- * Select cabinet options

Fig. No.	Trim Style	Trim Proj Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Knockout locations				Wall Opening Required			FIRE RATED CABINETS Wall Opening Required FR Option		
					A	B	C	D	E	J	K	M	N	Width	Height	Depth	Width	Height	Depth
1000	Recessed	3/8"	1 1/2"	75'	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	5 3/4	26	32 1/8	6 5/8
1001	Semi-recessed	1 1/4"	1 1/2"	Poly	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	4 7/8	26	32 1/8	5 3/4
1002	Trimless	2 1/2"	1 1/2"	50'	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	3 5/8	26	32 1/8	4 1/2
1006	Surface		1 1/2"	SJRL	24	30	6	24 1/4	30 1/4	4	2 1/2	4	2 1/2	24 1/2	30 1/2	6 1/4			
1008	Surface		1 1/2"	Hose	27 3/16	33 3/16	6 1/2	27 3/8	33 3/8	a	a	a	a						
1010	Recessed	3/8"	1 1/2"	100'	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	5 3/4	26	36 7/8	6 5/8
1011	Semi-recessed	1 1/4"	1 1/2"	Poly	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	4 7/8	26	36 7/8	5 3/4
1012	Trimless	2 1/2"	1 1/2"	75'	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	3 5/8	26	36 7/8	4 1/2
1016	Surface		1 1/2"	SJRL	24	34 3/4	6	24 1/4	35	4	2 1/2	4	2 1/2	24 1/2	35 1/4	6 1/4			
1018	Surface		1 1/2"	Hose	27 3/16	37 15/16	6 1/2	27 3/8	38 1/8	a	a	a	a						

a- No knockouts provided unless specified on surface mounted cabinets


Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frames

NOTE: FIRE RATED CABINETS HAVE NO KNOCKOUTS

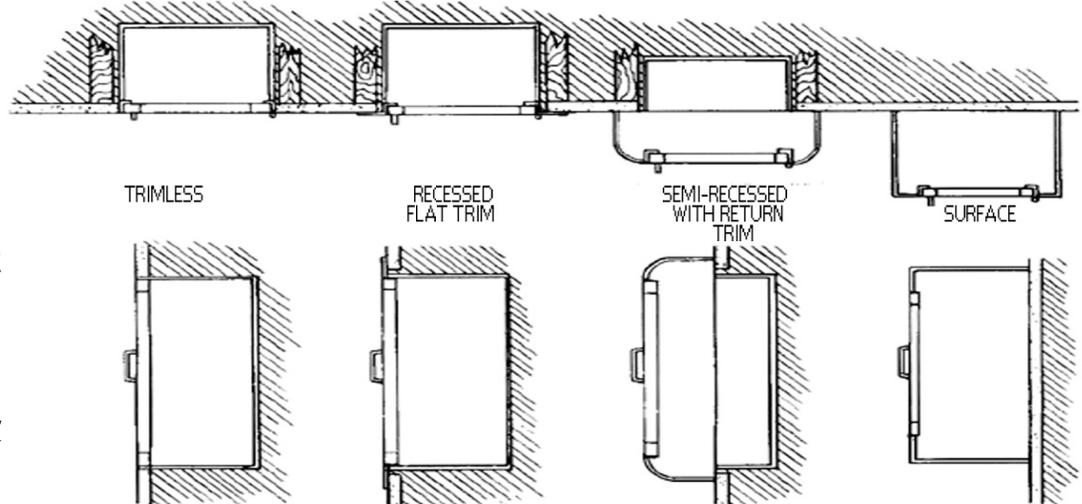

For Use With 2 1/2" X 1 1/2" Fire Hose Rack Assembly

Series 1100 cabinets will accommodate a single 2 1/2" X 1 1/2" Fire Hose Rack assembly .

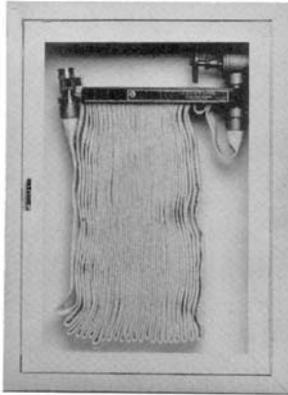

1100 Series

STANDARD EQUIPMENT

- * Heavy gauge steel construction tub, door and trim
- * White powder coat finish
- * Continuous steel piano hinge
- * Pull handle with roller catch

CABINET OPTIONS

- * Prefix **FR** for Fire Rated Cabinet
- * Suffix **AL** for clear anodized aluminum door and frame
- * Suffix **SS** for Stainless Steel # 4 finish door and frame
- * Suffix **FF** for Detention Grade Heavy Steel Door And Trim
- * Door Styles See page 2-5
- * Other cabinet options See page 2-7, 2-19 and 2-20

ORDERING PROCEDURE

- * Select cabinet Figure No.
- * Select door style
- * Select type of hose rack assembly (Refer to Section 3000)
- * Select cabinet options



Fig. No.	Trim Style	Trim Poj. Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Knockout locations				Wall Opening Required			FIRE RATED CABINETS Wall Required FR Option		
					A	B	C	D	E	J	K	M	N	Width	Height	Dept	Width	Height	Dept
1100	Recessed	3/8"	2 1/2"	75'	24	30	8	27 3/8	33 3/8	4	2 1/2	4	4	25	31	7 3/4	26	32 1/8	8 5/8
1101	Semi-recessed	1 1/4"	2 1/2"	Poly	24	30	8	27 3/8	33 3/8	4	2 1/2	4	4	25	31	6 7/8	26	32 1/8	7 3/4
1102	recessed	2 1/2"	2 1/2"	50'	24	30	8	27 3/8	33 3/8	4	2 1/2	4	4	25	31	5 5/8	26	32 1/8	6 1/2
1106	Trimless		2 1/2"	SJRL	24	30	8	24 1/4	30 1/4	4	4	4	4	24 1/2	30 1/4	8 1/4			
1108	Surface		2 1/2"	Hose	27 3/16	33 3/16	8 1/2	27 3/8	33 3/8	a	a	a	a						
1110	Recessed	3/8"	2 1/2"	100'	24	34 3/4	8	27 3/8	38 1/8	4	2 1/2	4	4	25	35 3/4	7 3/4	26	36 7/8	8 5/8
1111	Semi-recessed	1 1/4"	2 1/2"	Poly	24	34 3/4	8	27 3/8	38 1/8	4	2 1/2	4	4	25	35 3/4	6 7/8	26	36 7/8	7 3/4
1112	recessed	2 1/2"	2 1/2"	75'	24	34 3/4	8	27 3/8	38 1/8	4	2 1/2	4	4	25	35 3/4	5 5/8	26	36 7/8	6 1/2
1116	Trimless		2 1/2"	SJRL	24	34 3/4	8	24 1/4	35	4	4	4	4	24 1/2	35 1/4	8 1/4			
1118	Surface		2 1/2"	Hose	27 3/16	37 15/16	8 1/2	27 3/8	38 1/8	a	a	a	a						
1120	Recessed	3/8"	2 1/2"	125'	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	7 3/4	26	40 7/8	8 5/8
1121	Semi-recessed	1 1/4"	2 1/2"	Poly	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	6 7/8	26	40 7/8	7 3/4
1122	recessed	2 1/2"	2 1/2"	100'	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	5 5/8	26	40 7/8	6 1/2
1126	Trimless		2 1/2"	SJRL	24	38 3/4	8	24 1/4	39	4	4	4	4	24 1/2	39 1/4	8 1/4			
1128	Surface		2 1/2"	Hose	27 3/16	41 15/16	8 1/2	27 3/8	42 1/8	a	a	a	a						

a- No knockouts provided unless specified on surface mounted cabinets


Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frames

9" Tub option available upon request on 1110 and 1120 Series

Note: FIRE RATED CABINETS HAVE NO KNOCKOUTS

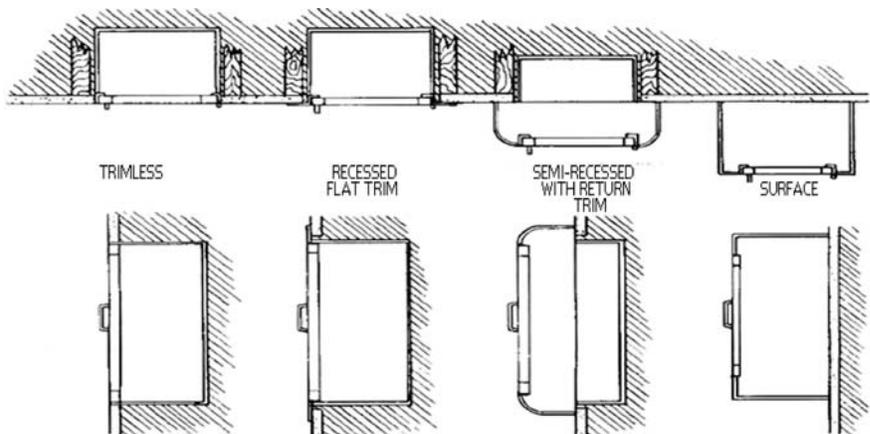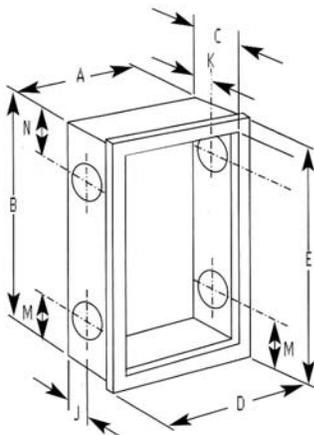

For Use With 1 1/2" Fire Hose Rack Assembly & 2 1/2" Fire Dept. Valve

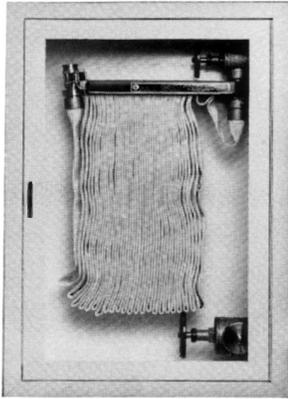

1200 Series

Series 1200 cabinets will accommodate a single 1 1/2" or 2 1/2" Fire Hose Rack assembly Fire Dept Valve with cap and chain.

STANDARD EQUIPMENT

- * Heavy gauge steel construction tub, door and trim
- * White powder coat finish
- * Continuous steel piano hinge
- * Pull handle with roller catch

CABINET OPTIONS

- * Prefix **FR** for Fire Rated Cabinet
- * Suffix **AL** for clear anodized aluminum door and frame
- * Suffix **SS** for Stainless Steel # 4 finish door and frame
- * Suffix **FF** for Detention Grade Heavy Steel Door And Trim
- * Door Styles See page 2-5
- * Other cabinet options See page 2-7, 2-19 and 2-20

ORDERING PROCEDURE

- * Select cabinet Figure No.
- * Select door style
- * Select type of hose rack assembly (Refer to Section 3000)
- * Select Fire Dept Valve with Cap and chain (Refer to Section 5000)
- * Select Cabinet Options

Fig. No.	Trim Style	Trim Proj. Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Knockout locations				Wall Opening Required			FIRE RATED CABINETS Wall Opening Required FR Option		
					A	B	C	D	E	J	K	M	N	Width	Height	Depth	Width	Height	Depth
1200	Recessed	3/8"	1 1/2"	75'	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	7 3/4	26	40 7/8	8 5/8
1201	Semi-	1 1/4"		Poly	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	6 7/8	26	40 7/8	7 3/4
1202	Recessed	2 1/2"	or	50'	24	38 3/4	8	27 3/8	42 1/8	4	2 1/2	4	4	25	39 3/4	5 3/8	26	40 7/8	6 1/2
1206	Trimless		2 1/2"	SJRL	24	38 3/4	8	24 1/4	39	4	4	4	4	24 1/2	39 1/4	8 1/4			
1208	Surface			Hose	27 3/16	41 15/16	8 1/2	27 3/8	42 1/8	a	a	a	a						
1210	Recessed	3/8"	1 1/2"	100'	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	7 3/4	35	40 7/8	8 5/8
1211	Semi-	1 1/4"		Poly	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	6 7/8	35	40 7/8	7 3/4
1212	Recessed	2 1/2"	or	75'	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	5 5/8	35	40 7/8	6 1/2
1216	Trimless		2 1/2"	SJRL	32 3/4	38 3/4	8	33	39	4	4	4	4	33 1/4	39 1/4	8 1/4			
1218	Surface			Hose	35 15/16	41 15/16	8 1/2	36 1/8	42 1/8	a	a	a	a						

a- No knockouts provided unless specified on surface mounted cabinets

Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frame

9" Tub option available upon request on 1200 and 1210 Series

NOTE: FIRE RATED CABINETS HAVE NO KNOCKOUTS

