

## 1. 产品名称

## VK-E-1-AC-ZSFM 雨淋阀配件

## 2. 制造商

美国威景公司，详细信息请咨询威景上海全资子公司：

威景防火设备贸易（上海）有限公司

抗震专利所属公司：北京安诚普利机电设备有限公司

北京市西城区广安门外大街甲180号新纪元公寓506室

电话：0086-01-63397228

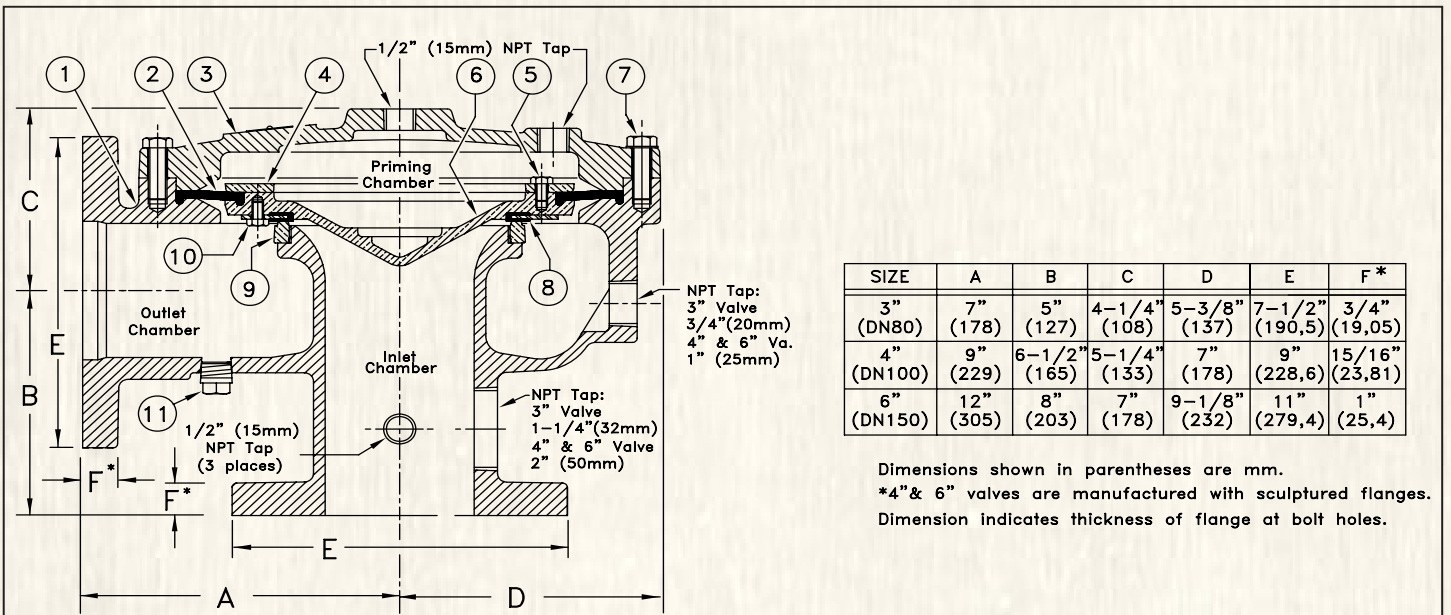


Figure 2: Replacement Parts

SIZE	A	B	C	D	E	F*
3" (DN80)	7" (178)	5" (127)	4-1/4" (108)	5-3/8" (137)	7-1/2" (190,5)	3/4" (19,05)
4" (DN100)	9" (229)	6-1/2" (165)	5-1/4" (133)	7" (178)	9" (228,6)	15/16" (23,81)
6" (DN150)	12" (305)	8" (203)	7" (178)	9-1/8" (232)	11" (279,4)	1" (25,4)

Dimensions shown in parentheses are mm.

\*4" & 6" valves are manufactured with sculptured flanges.

Dimension indicates thickness of flange at bolt holes.

ITEM NO.	PART NUMBER			DESCRIPTION	MATERIAL	NO. REQ'D		
	3" (DN80)	4" (DN100)	6" (DN150)			3" (DN80)	4" (DN100)	6" (DN150)
1	VK-E-1-Body-AC-3"/4"/6"			阀体	Ductile Iron 60-40-18 or 65-45-12	1	1	1
2	VK-E-1-DR-AC-3"/4"/6"			橡胶隔膜	EPDM, ASTM D2000	1	1	1
3	VK-E-1-Cover-AC-3"/4"/6"			阀盖	Ductile Iron 65-45-12	1	1	1
4	VK-E-1-ClampRing-AC-3"/4"/6"			压环	Brass UNS-C84400	1	1	1
5	--	--	--	螺钉, R.H., No. 10-24 x 1/2" (12.7 mm) lg.	Stainless Steel UNS-S30200	6		
	--	--	--	螺钉, H.H.C., 5/16" - 18 x 1/2" (12.7 mm) lg.	Monel		8	
	--	--	--	螺钉, H.H.C., 3/8"-16 x 5/8" (15.9 mm) lg.	Stainless Steel UNS-S30200			12
6	VK-E-1-Clapper-AC-3"/4"/6"			阀瓣	Ductile Iron 65-45-12 Teflon® Coated	1	1	1
7	--	--	--	螺钉 H.H.C., 1/2"-13 x 1-1/4" (31.8 mm) lg.	Steel	10		
	--	--	--	螺钉, H.H.C., 1/2"-13 x 1-1/2" (38.1 mm) lg.	Steel		12	
	--	--	--	螺钉, H.H.C., 5/8"-11 x 1-3/4" (44.5 mm) lg.	Steel			15
8	VK-E-1-SRA-AC-3"/4"/6"			阀座橡胶组件	EPDM/Stainless Steel UNS-S30400	1	1	1
9	VK-E-1-Seat-AC-3"/4"/6"			阀座	Brass UNS-C84400	1	1	1
10	--	--	--	螺钉, R.H., 10-24 x 3/8" (9.5 mm) lg.	Stainless Steel	6		
	--	--	--	螺钉, H.H.C., 5/16" - 18 x 1/2" (12.7 mm) lg.	Monel		8	
	--	--	--	螺钉, H.H.C., 3/8"-16 x 1/2" (12.7 mm) lg.	Stainless Steel			12
11	--	--	--	丝堵, 1/2" NPT	Steel	1	1	1
--Indicates replacement part not available								
<b>Sub-Assembly</b>								
2, 4-8, 10	13397	13399	13482	VK-E-1-Clapper Assembly Kit-AC				